
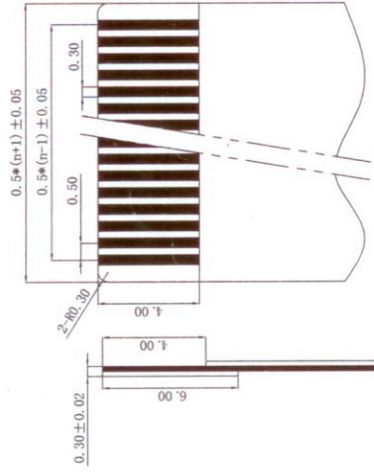
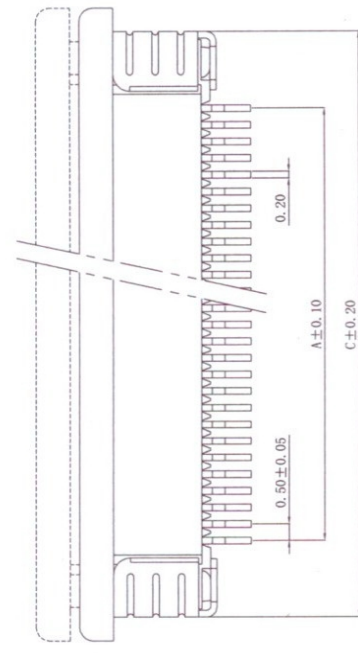



5	6	变更内容	变更日期	变更单号	变更者
1.0					

受控文件



适用扁平电缆

性能:
 额定电流: 0.4A
 额定电压: 50V
 耐电压: 200V
 接触电阻: ≤20mΩ
 绝缘电阻: 500MΩ
 工作温度: -25℃~+85℃

塑件 (材质): LCP, UL94V-0
 锁扣 (材质): PPS, UL94V-0
 插簧 (材质): 磷青铜, 镀锡
 焊片 (材质): 磷青铜, 镀锡

PCB LAYOUT

CKT.	A	B	C	D	CKT.	A	B	C	D
4	1.50	2.60	6.35	7.65	33	16.00	17.10	20.85	22.15
5	2.00	3.10	6.85	8.15	34	16.50	17.60	21.35	22.65
6	2.50	3.60	7.35	8.65	35	17.00	18.10	21.85	23.15
7	3.00	4.10	7.85	9.15	36	17.50	18.60	22.35	23.65
8	3.50	4.60	8.35	9.65	37	18.00	19.10	22.85	24.15
9	4.00	5.10	7.85	10.15	38	18.50	19.60	23.35	24.65
10	4.50	5.60	9.35	10.65	39	19.00	20.10	23.85	25.15
11	5.00	6.10	9.85	11.15	40	19.50	20.60	24.35	25.65
12	5.50	6.60	10.35	11.65	41	20.00	21.10	24.85	26.15
13	6.00	7.10	10.85	12.15	42	20.50	21.60	25.35	26.65
14	6.50	7.60	11.35	12.65	43	21.00	22.10	25.85	27.15
15	7.00	8.10	11.85	13.15	44	21.50	22.60	26.35	27.65
16	7.50	8.60	12.35	13.65	45	22.00	23.10	26.85	28.15
17	8.00	9.10	12.85	14.15	46	22.50	23.60	27.35	28.65
18	8.50	9.60	13.35	14.65	47	23.00	24.10	27.85	29.15
19	9.00	10.10	13.85	15.15	48	23.50	24.60	28.35	29.65
20	9.50	10.60	14.35	15.65	49	24.00	25.10	28.85	30.15
21	10.00	11.10	14.85	16.15	50	24.50	25.60	29.35	30.65
22	10.50	11.60	15.35	16.65	51	25.00	26.10	29.85	31.15
23	11.00	12.10	15.85	17.15	52	25.50	26.60	30.35	31.65
24	11.50	12.60	16.35	17.65	53	26.00	27.10	30.85	32.15
25	12.00	13.10	16.85	18.15	54	26.50	27.60	31.35	32.65
26	12.50	13.60	17.35	18.65	55	27.00	28.10	31.85	33.15
27	13.00	14.10	17.85	19.15	56	27.50	28.60	32.35	33.65
28	13.50	14.60	18.35	19.65	57	28.00	29.10	32.85	34.15
29	14.00	15.10	18.85	20.15	58	28.50	29.60	33.35	34.65
30	14.50	15.60	19.35	20.65	59	29.00	30.10	33.85	35.15
31	15.00	16.10	19.85	21.15	60	29.50	30.60	34.35	35.65
32	15.50	16.60	20.35	21.65	61	30.00	31.10	34.85	36.15

MATERIAL		TOLERANCE UNSPECIFIED		SCALE		UNIT		PART NO.	
SEE NOTES		± 0.20 ± 0.25 ± 0.30		1:1		mm		PP-050XX00	
FINISH	DRAWN	NAME	ANGLE		SHEET		REV.		
SEE NOTES	曹 琨	0.5mm PPC Top	DRAWING NO. FP-050XX00-002		1/1		A/O		
APPROVED		DRAWING NO. FP-050XX00-002		REV.		A/O			