

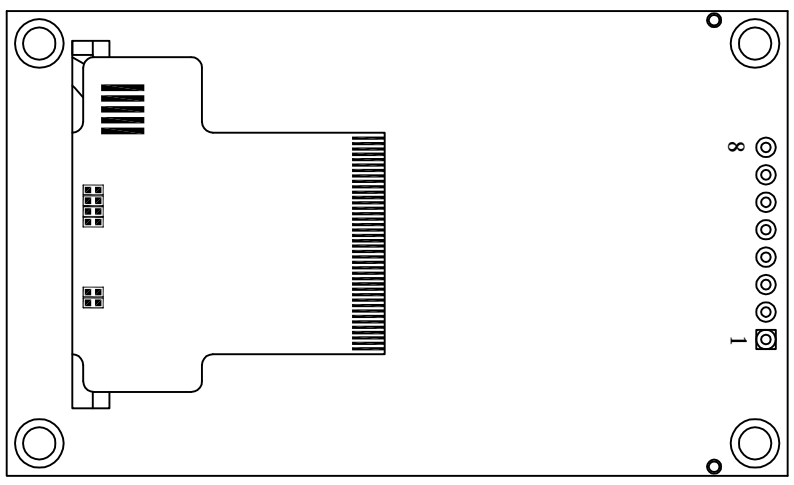


***不要长时间显示固定图案，因为它可能会因ICM结构而产生图像残留。如果屏幕以固定模式显示，请使用屏幕保护程序。

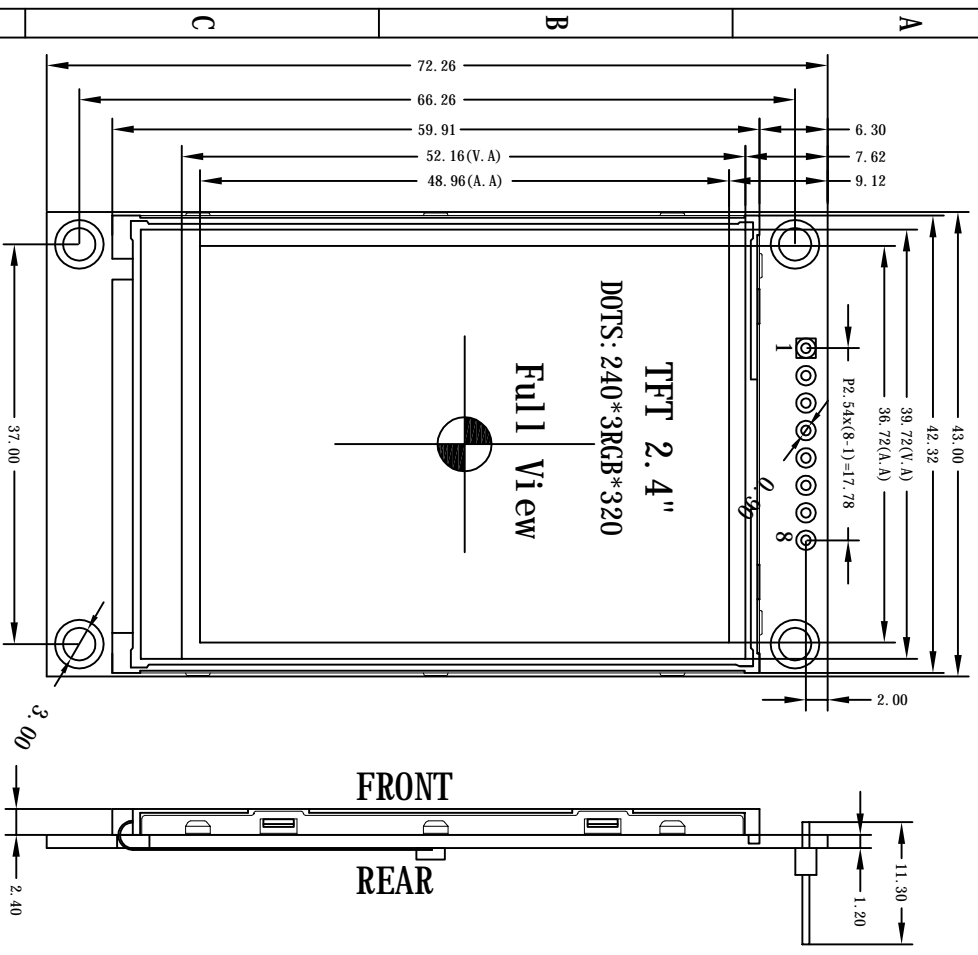

PIN NO.	SIGNAL	Description
1	VSS	Ground.
2	VDD	Power Supply for Analog.
3	CLOCK	Clock signal.
4	SDI	Serial input data.
5	RES	Signal is active low.
6	D/C	Data/command selection.
7	BLK	Cathode of Backlight 0V.
8	SD0/CS	Serial output data.

D		A	
*1. LCD Display Type	TFT, Transmissive, Normally Black	*6. Storage Temp	-30° C-80° C
*2. Viewing Direction	Full View	*7. Driver IC	ST7789V
*3. Interface	MCU SPI-4L	*8. Backlight	WHITE VF=3.3V IF=100mA(Typ)
*4. Operating Voltage	VCI=3.3V	*9. LCM Brightness	850 cd/m ²
*5. Operating Temp	-20° C-70° C		



HOT DISPLAY

Dwg Title: **HTMD24SPI-3**

EDC No: _____ Ver: A/0

Scale	Unit	Tol.	Ver.
1:1	mm	±0.3	

Drawn	Checked	Date:
		2019-04-22